




EIP-X350

XGA DLP® Projector 3500 ANSI Lumens

KEY FEATURES: Model EIP-X350

- 3500 ANSI Lumens, 80% uniformity, and 2000:1 contrast ratio.
- True XGA resolution. SXGA+ through VGA and MAC compatible.
- Smart data compression / expansion, and video scaling.
- DVI-I input supports analog & digital data, plus digital video w/HDCP.
- Accepts Composite, S, and Component Video, both 4:3 and 16:9.
- Compatible with HD input resolution up to 1080i.
- Convenient manual zoom (1.2X) and focus lens.
- Built-in image offset. Vertical digital keystone correction.
- Power Management and Eco mode help prolong lamp life.
- Selectable menu position and timeout. Auto input selection.
- Wireless remote control. Carrying case included.
- 3 Year* Projector Warranty!

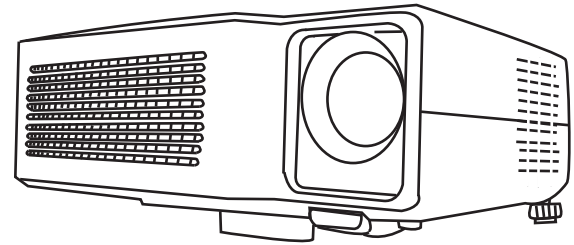

EIP-X350

Included Accessories: Quick Set-up Guide. Owner's Manual on CD. AC Power Cord. Lens Cover. VGA type Computer Input Cable (HD15~HD15). Composite Video Cable. S-Video Cable. Audio Cable. Wireless Remote Control & Batteries (AAA x 2). Carry Case.

Optional Accessories: Replacement Lamp. VGA ~ Component Video input cable (HD15~3-RCA). Mouse Cable (USB-A ~ USB-B). RS-232 Control Cable (DB9 ~ 6-pin DIN). Ceiling Mount. Ceiling Post and Plate. EZ-250 Local Control. NPC-1 Network Control.

SPECIFICATIONS: Model EIP-X350

Screen Brightness	3,500 ANSI Lumens	Video: Compatibility.....	NTSC / PAL / SECAM / NTSC 4.43 / PAL-M&N
Illumination Uniformity	80%	Video: HD Compatibility.....	480i/p, 540p, 576i/p, 720p, 1035i, 1080i
Size of Color Palette	16.7 Million	Video: Formats Supported.....	Normal 4:3 and Wide Screen 16:9
Contrast Ratio	2000:1	Video: Image Sizing.....	Video Scaling Technology
Projection Lamp	300 Watt UHP	Signal Inputs:	
Estimated Lamp Life	2000 Hours (Standard)	Digital Computer / Digital Video w/HDCP.....	DVI-D x 1
Imaging System.....	0.7" in. DMD	Analog Computer/Component Video (w/optional adapter) ...	HD15 x 1
Screen Pixels	1024x768 in stripe configuration	Component Video	RCA x 3
Total Pixels	786,432 ((1024x768) x 1)	S Video:.....	S-Video x 1
Lens Type	Manual Zoom and Focus	Composite video	RCA x 1
Lens Specs.....	Speed: f:2.3~2.75; FL: .0.929~1.112 in. (23.6~28.25 mm)	Audio Input.....	Ministereore x 1
Lens Ratio	Zoom Max:Min: 1.2:1; Throw:Width: 1.74~2.04:1	Signal Outputs:	
Image Diagonal	30~300 in. (76.2~762 cm)	Analog Computer	HD15 x 1
Image Width	2.07~18.52 ft. (0.63~5.7 m.)	Audio output.....	Ministereore x 1
Throw Distance (tele ~ wide)	3.94 ~ 32.8 ft. (1.2~10.0 m.)	Sound System - Amplifier	2 Watt (Mono)
Front Elevation	up to 8° up	Sound System - Speakers	1.1 in. (2.8 cm) x1
Anti Keystone	Image starts 15.5% of image height above lens center	Fan Noise	as low as 32 dBA
Vertical Keystone Correction	Digital: up to 15° up or down	Cabinet Size (HxWxD).....	4.0 x 12.2 x 9.0 in. (102 x 309 x 229 mm.)
Scanning Frequency	Auto: H Sync. 31-79kHz; V Sync. 50-85Hz	Weight	7 lbs. (3.2kg)
Dot Clock	108 MHz	Packaged Size (H x W x D).....	14.4 x 14.6 x 9.3 in (365 x 370 x 235 mm)
Image Orientation	Normal, Reversed, Inverted	Packaged Weight	12.97 lb. (5.89 Kg)
Local Control / Power Management	Full Function / Auto Shut-Off	Power Requirements.....	100-240V AC, 50/60Hz
Remote Projector control w/mouse.....	Wireless (Infra Red) x 1	Power Consumption	up to 380 W
RS-232 Control Port	6 Pin x 1	Heat.....	up to 1297 BTU (327 KC)
Mouse (Page Up/Down) & Firmware Update Port	USB Type B x 1	Power Cord.....	6' (1.8 M) Type 3, Detachable
TRIGGER terminal	DC 12V output	Electrical Safety Compliance	UL / CSA
Computer Native Resolution	1024x768 (XGA)	Electromagnetic Compatibility	FCC Class B, CE Mark
Computer: Compatibility	SXGA+, SXGA, XGA, SVGA, VGA & MAC	Security Facilities.....	Kensington® Security Slot
Computer: Formats.....	1400 x 1050 through 640x480	Operating Temperature.....	32~104°F (0~40°C)
Computer: Higher Resolutions	Displayed panned or Smart Compressed	User Maintenance	Replace Lamp
Computer: Lower Resolution	Displayed normal or Smart Expanded	UPC.....	4571194671629
		Warranty (to the original end-use customer)	
		Projector:	3 Yr. / 6000 Hr. *(Parts & Labor to Correct Defects)
		Lamp:	90 Days (Failed Lamp Replaced Pro-Rata)
			* Whichever occurs first

Lamp contains Mercury. Do not put in trash. Dispose of as Hazardous Waste, according to Local, State or Federal Laws.

Specifications subject to change without notice. ©2007 Eiki International, Inc. Issued June 19, 2007.

Eiki International, Inc., 30251 Esperanza, Rancho Santa Margarita, CA 92688-2132. Tel: 800-242-3454; Fax: 800-457-3454, E-mail: usa@eiki.com
In Canada: 310 First St., Unit 2, P.O. Box 156, Midland, ON L4R 4K8. Tel: 800-563-3454, Fax: 800-567-4069, E-mail: canada@eiki.com
Visit our World Wide Web site: <http://www.eiki.com>